

TS-S24 Instruction Manual


1.Functions

- ◆ LED time display
- ◆ 12/24 hour system
- ◆ Alarm & Snooze
- ◆ Temperature display °C or °F
- ◆ Temperature range: 0°C ~ 50°C.
- ◆ Night mode setting (18:00-06:00)
- ◆ Mirror
- ◆ Time and temperature switching
- ◆ 3-speed lamp brightness adjustment
- ◆ 4 function buttons (SET,UP, DOWN, RGB)
- ◆ Time memory function
(1XCR2032 battery for time memory function)
- ◆ Driving mode: The host can only use USB cable to plug in.
CR2032 button cell battery for time memorization
- ◆ LED display is always on when driven by USB cable.



2. Function buttons

a. Press SET button to toggle: Time -> Temperature -> Alarm -> Night mode ON/OFF

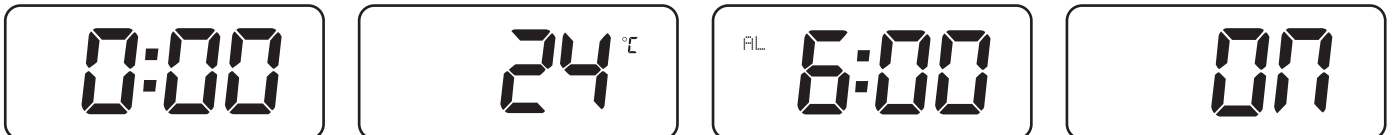

b. Press UP button to switch 3 levels of lamp brightness adjustment.



c. In time mode, press DOWN to turn on/off the alarm function



remote controls

e. Press the finger button to select any of the RGB lights (Red, Orange, Green, Blue, Sky Blue, Purple, White, toggle 7-color light, turn off the RGB lights).The RGB lights can only be used under USB cable drive.



3. Operation

1) Time Setting

- ① In time mode, long press SET to set the time, the order is 12 hours/24 hours -> hours -> minutes.
- ② During the setting process, the setting item will flash
- ③ Press UP button to add 1 at a time, long press UP button to increase at the rate of 8 steps.
- ④ Press DOWN button to decrease 1, press and hold DOWN button to decrease the speed by 8 steps.
- ⑤ If 12-hour system is selected, PM display indicates afternoon time. ⑤ If 12-hour system is selected, PM display indicates PM time. No display indicates AM time (AM time will not reflect AM).
- ⑥ Press SET or no operation within 10 seconds to confirm the setting and return to normal mode.



12-hour format



24-hour format

2) Alarm Clock Setting

- ① In time mode, press SET three times to enter time setting mode.
Long press SET, AL icon and hour flash, enter alarm time setting, the order is hour -> minute -> snooze time (5 minutes to 60 minutes)
- ② Press UP button to add 1 step at a time, long press UP button to add 8 steps.
- ③ Press the DOWN button to decrease by 1, and press and hold the DOWN button to decrease the speed by 8 steps.
During the setting process, the AL icon will blink.
- ⑤ Press SET or no operation within 10 seconds to confirm the setting and return to normal mode.
- ⑥ Press any button to stop the alarm when it is sounding.

3) When ringing the alarm

- ① BIBIBIBI alarm for 2 minutes.
- ② Press SET to stop the alarm, turn on the snooze function, and the AL icon blinks until the next alarm time.
- ③ Press UP and DOWN to turn off the alarm. If AL icon stops flashing, turn off alarm time.
- ④ The RGB lights will flash together when the alarm is on.

4) Snooze

The default snooze time is 5 minutes.

- ② In alarm mode, long press SET to enter the alarm setting, press SET three times to enter the snooze time setting. 05 blinking, press UP or DOWN to set the snooze time from 5 minutes to 60 minutes
- ③ Press UP button once to add 1, long press UP button, increase at the rate of plus 8 steps
- ④ Press DOWN button to decrease by 1, long press DOWN button to decrease by 8 steps.
- ⑤ Alarm clock, press SET to stop the alarm clock, turn on snooze, AL blinking until the end of the next alarm clock time. When the host is powered by CR2032 button battery only, press any button, the LED light will only be on for 5 seconds.



5) Night Mode

- ① Night mode: LED light will be dimmed automatically at night time
- ② In the time interface, press SET button 4 times to enter night mode. Press UP or DOWN button to switch on/off the night mode, ON means turn on the night mode, OFF means turn off the night mode.
- ③ Default night mode time is 18:00-6:00
- ④ When night mode is ON, long press SET to enter night mode setting, the setting sequence is: night time start hour -> night time start minute -> night time end hour -> night time end minute.
When night time start time is set, the upper circle of the mirror is lighted, when night time end time is set, the lower circle of the mirror is lighted.


6) Temperature Display

- ① In time mode, press SET to display temperature. Press UP to switch temperature °C/°F
- ② In temperature mode, press and hold SET until the BI sound is heard. the LED switches to display: temperature (5 seconds) -> time (10 seconds)
- ③ Press and hold SET to hear BI sound again and return to time screen.



4. Power supply

- 1. The host uses DC5V USB power cable for power supply, CR2032 button battery for memory function, the shipment does not include button battery.

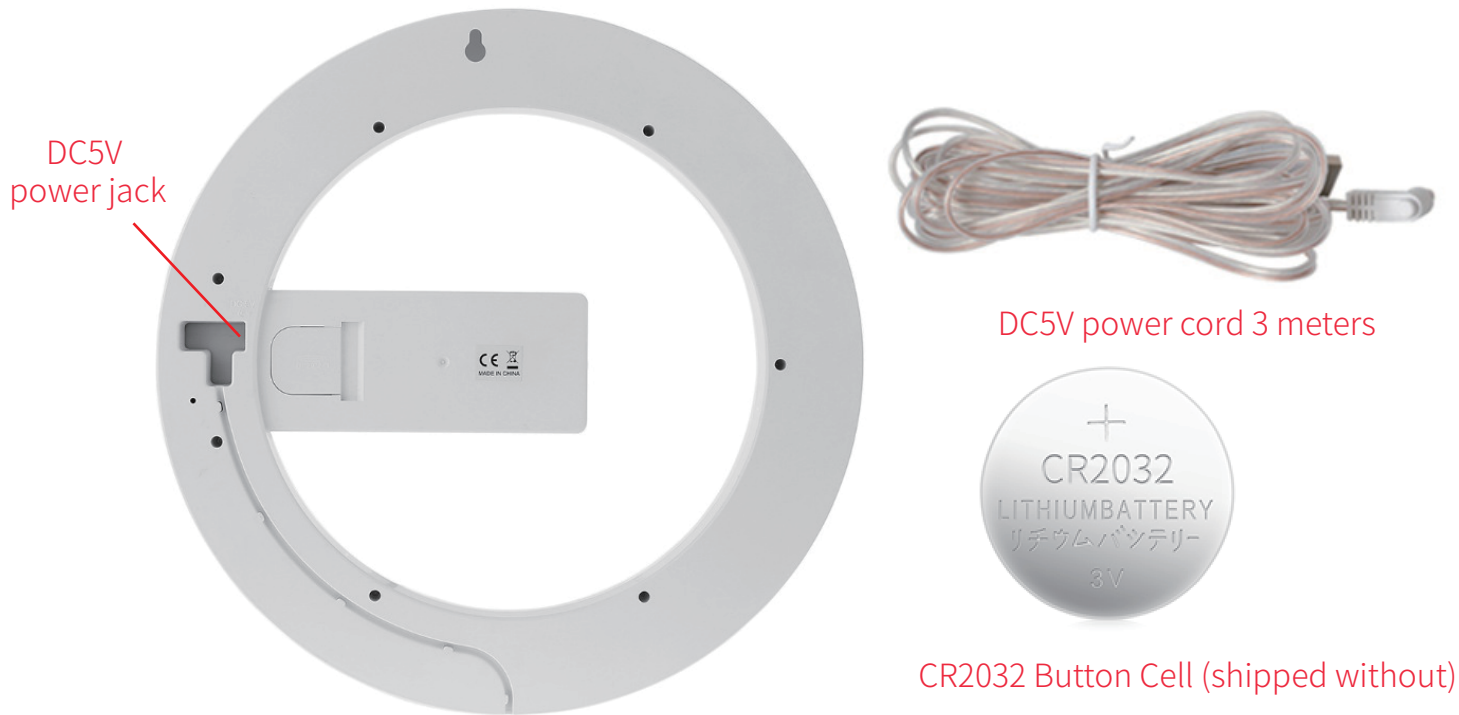

2. The remote control is powered by CR2032 button cell batteries (button cell batteries are not included in the shipment). The base of the remote control can be directly affixed to a convenient location using double-sided tape. Remote control with two powerful magnets, more convenient to use!

