

INSTRUCTIONS

使用说明书

适用于F8/F105系列

Note Kee

CONTENTS

目 录


中文

产品介绍	1
操作使用方法	2
开机和关机	2
无线连接	3
功能键盘介绍	4
产品参数	5
产品特点	5
充 电	6
保 养	6

英文

Product introduction	7
Load/Unload the ipad	8
Turn on and off	8
Wireless connection	9
Keyboard function introduction	10
Product parameters	11
Product features	11
Recharge the keyboard	12
Maintenance	12
Keyboard battery disposal	13

产品介绍

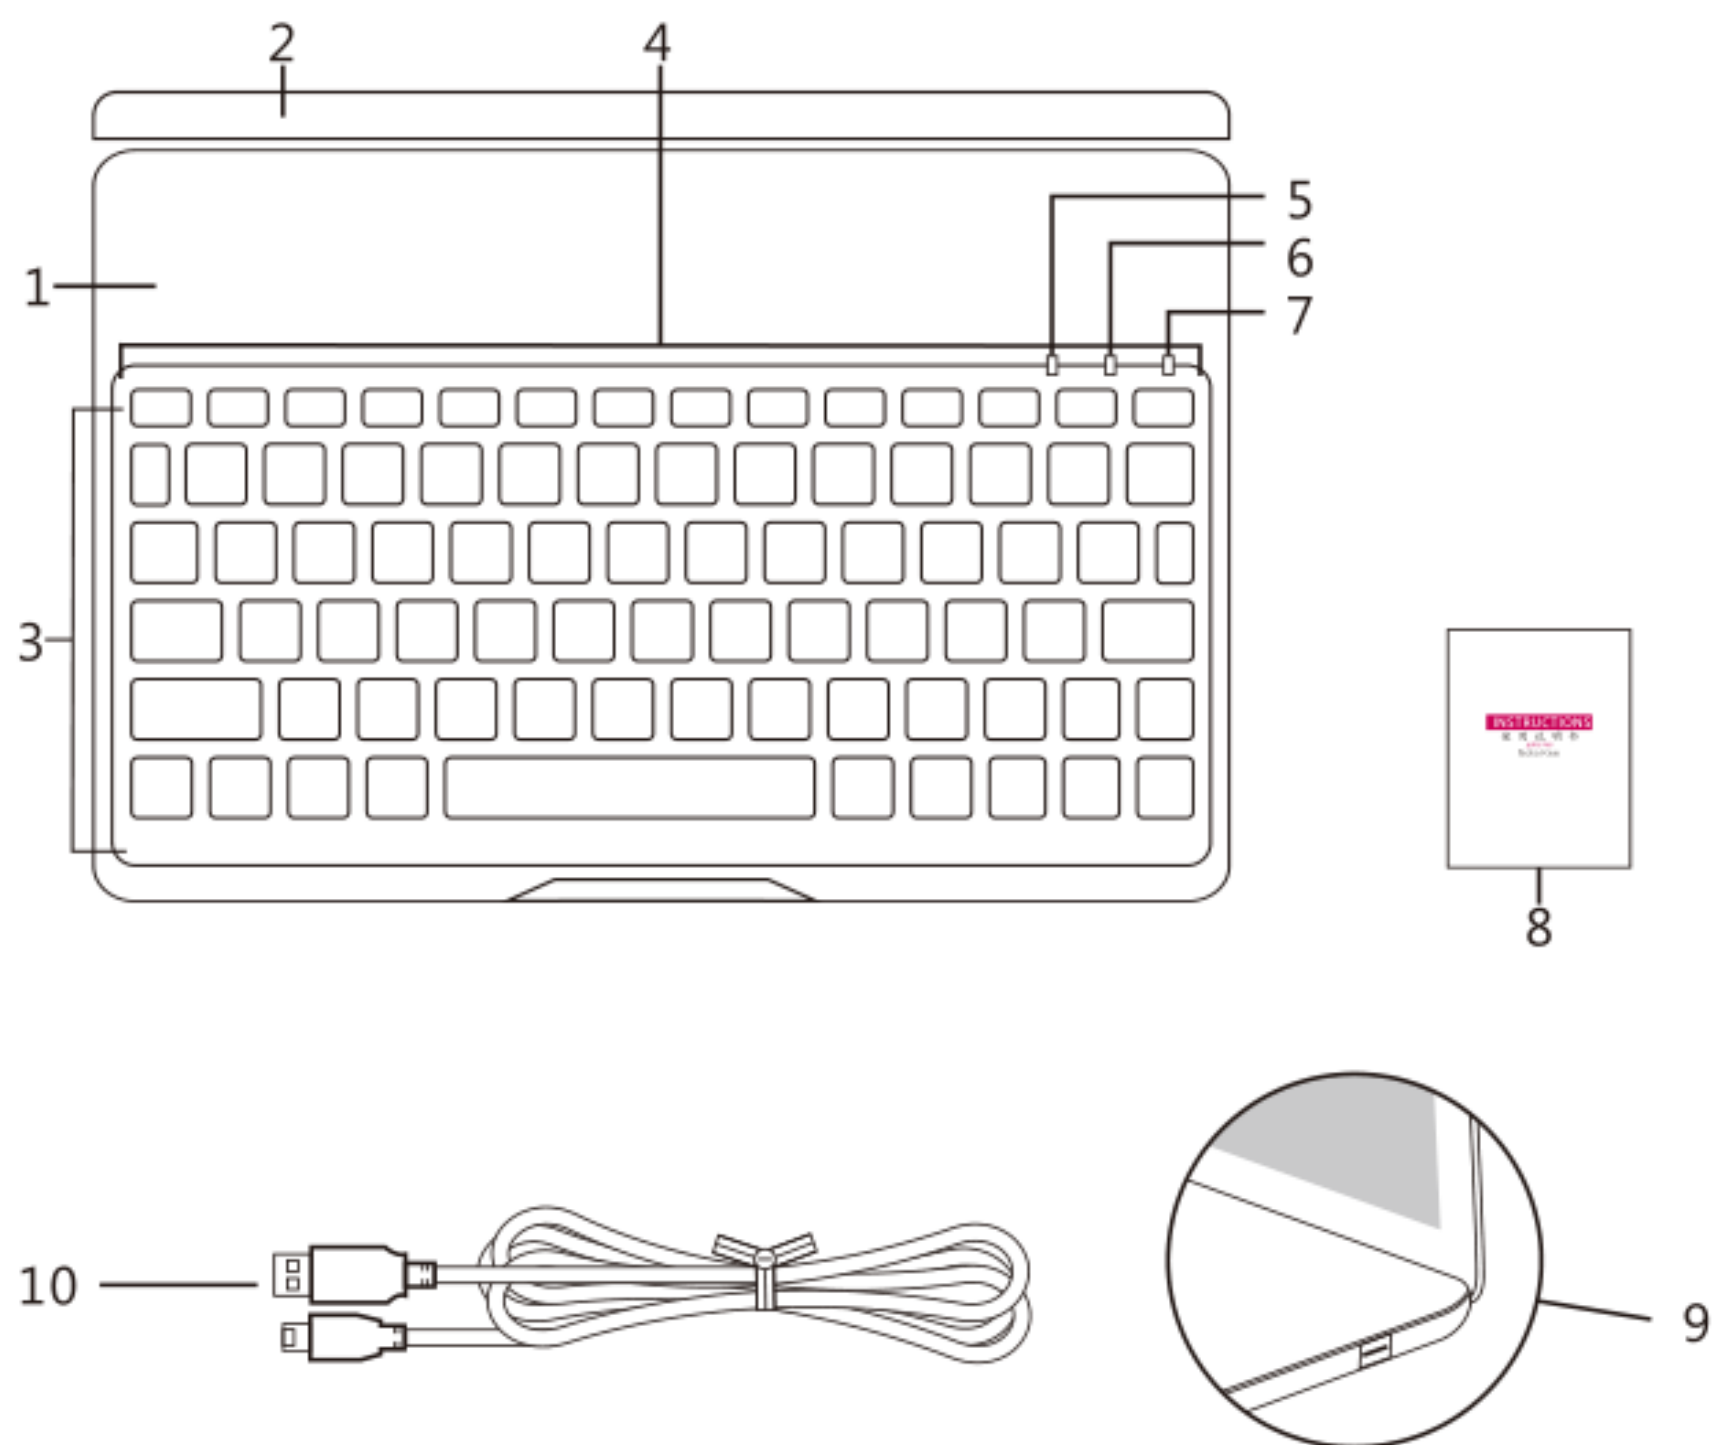

1. 键盘主体
2. 保护盖
3. 键盘
4. 功能键
5. 大小写切换指示灯

6. 电量指示灯
7. 无线连接指示灯
8. 说明书
9. 键盘充电接口
10. Micro USB连接线

操作使用方法


装机



卸机



开机和关机

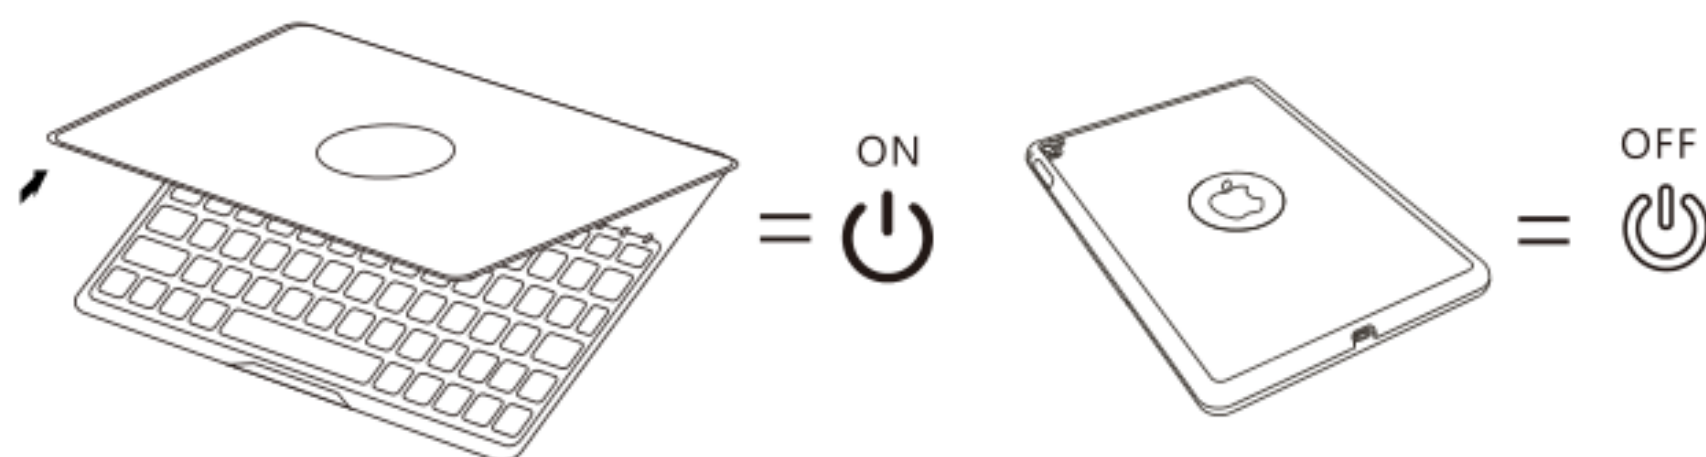


开机：打开键盘盖，键盘的三个指示灯亮3秒，然后灭，表示键盘已开机

关机：合上键盘盖，键盘自动关机

无线连接

1

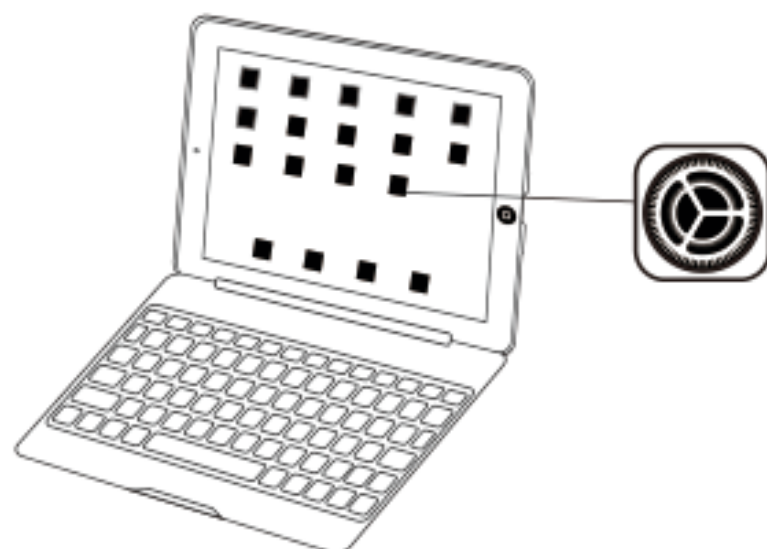


打开您iPad的设置

2



让您的iPad处于无线配对状态

3

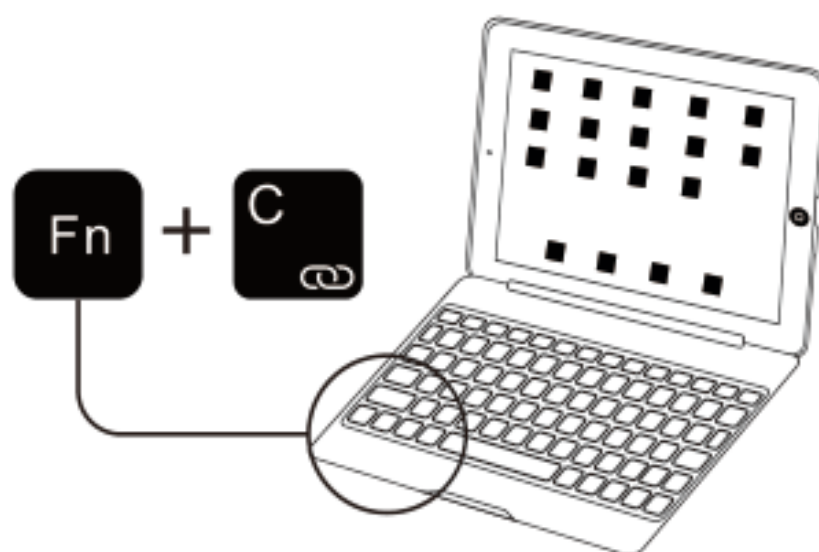


打开键盘电源，然后在键盘上按 **Fn** + **C** 键，键盘在三年内将处于等待搜索状态。

4



在iPad机器上搜索到键盘无线信号 " iPad Keyboard "，点击连接，无线信号灯熄灭，配对成功。

功能键盘介绍

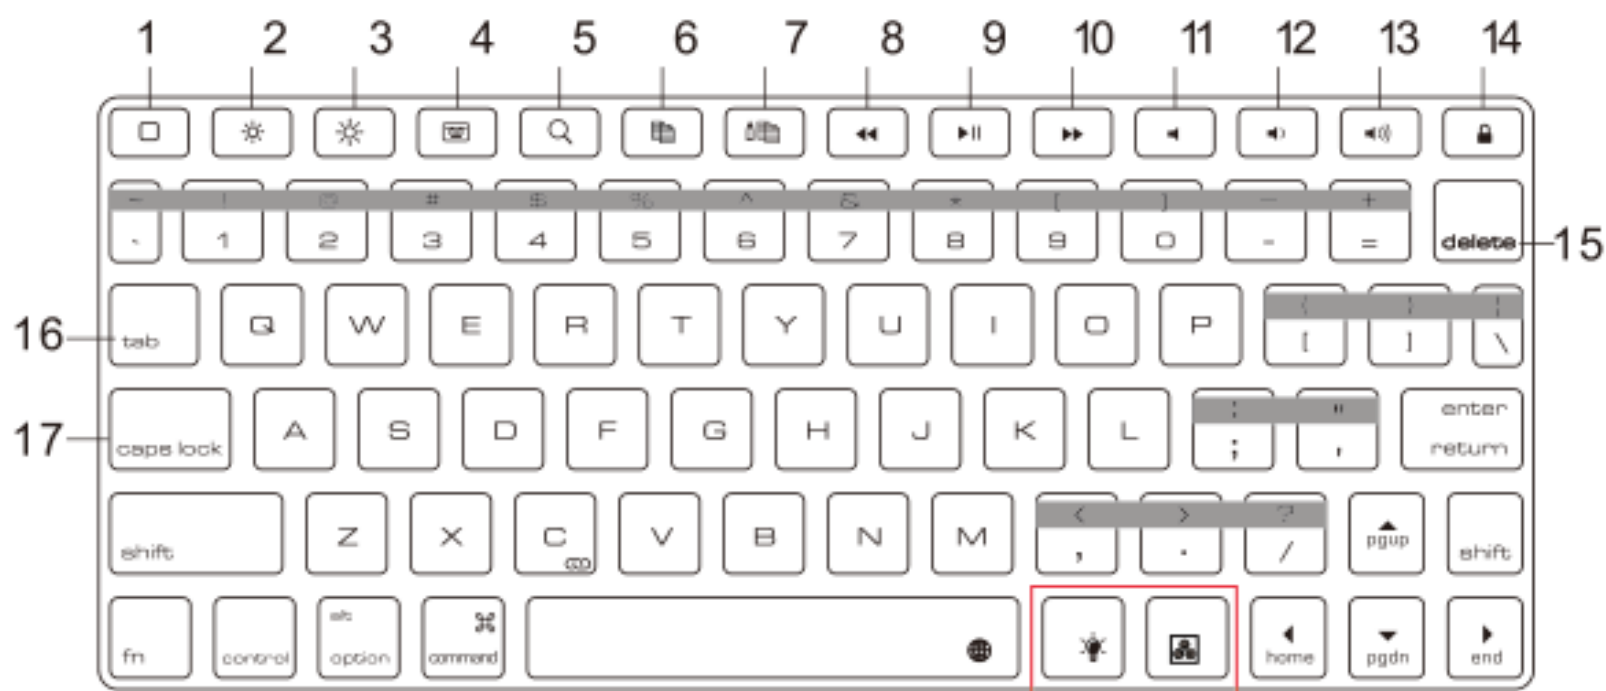

无背光款为:



- | | |
|---------------------|----------------------|
| 1. Home键显示iPad的主屏幕 | 10. 下一首 |
| 2. 更暗 | 11. 静音 |
| 3. 更亮 | 12. 减弱音量 |
| 4. 显示/隐藏虚拟键盘 | 13. 增加音量 |
| 5. 启动iPad搜索功能 | 14. Fn+ 锁定或解锁iPad屏幕 |
| 6. 复制 | 15. delete 删除 |
| 7. 粘贴 | 16. tab 切换下一步 |
| 8. 上一首 | 17. caps lock 大小写切换 |
| 9. 播放/暂停 | |

部分功能按键特别说明:

- 切换语言输入法，需同时按 + 。
- 背光灯开启、关闭及亮度调节，操作方式是：首次按是灯光开启，第二次按是灯光亮度增强，第三次按灯光达到最亮，第四次按则关闭灯光。
- 背光颜色切换，按这个切换键有七种不同颜色（红、黄、蓝、绿、青、紫、白）。
- 你想打出灰色区域里的字,例如"@"字 需同时按 + 键。
(注：第2、3项适用于背光机型)

5、 +其它的按键，能打出一些不常用的特殊字符。

6、部分字符快捷键：

剪切： + 

粘贴： + 

全选： + 

复制： + 

产品参数

F8系列/F105系列

- | | |
|--|------------------|
| 1. 操作距离：10米 | 8. 充电时间：≤3小时 |
| 2. 调制系统：GFSK | 9. 锂电池容量：500 mAh |
| 3. 工作电压：3.3-4.2V | 10. 锂电池寿命：3年 |
| 4. 工作电流：2.5 mA | 11. 键盘使用寿命：>5百万次 |
| 5. 充电电流：250 mA 左右 | 12. 工作温度：-10±55℃ |
| 6. 待机时间：50天 | |
| 7. 持续工作时间：180小时(关闭背光)
3小时(打开背光)
无背光款持续工作时间：180小时 | |

产品特点

无背光款

超薄便捷

采用超薄的设计理念，键芯厚度仅为4mm
携带超级轻便

人性化支架

翻盖支架式设计，使您的iPad在最佳的视带角度，满足您的视带需求

智能开关

磁吸式智能感应，打开键盘盖便可打开键盘电源，合上便可自动进入休眠模式。快捷键Fn+C便可进行无线配对。摆脱旧式繁琐的配对，更方便更快捷

背光款

超薄便捷

采用超薄的设计理念，键芯厚度仅为4mm
携带超级轻便

人性化支架


翻盖支架式设计，使您的iPad在最佳的视带角度，满足您的视带需求

七彩背光

七种颜色背光设计，高、中、低三档亮度调节，给您不同的视觉享受。

智能开关


磁吸式智能感应，打开键盘盖便可打开键盘电源，合上便可自动进入休眠模式。快捷键Fn+C便可进行无线配对。摆脱旧式繁琐的配对，更方便更快捷

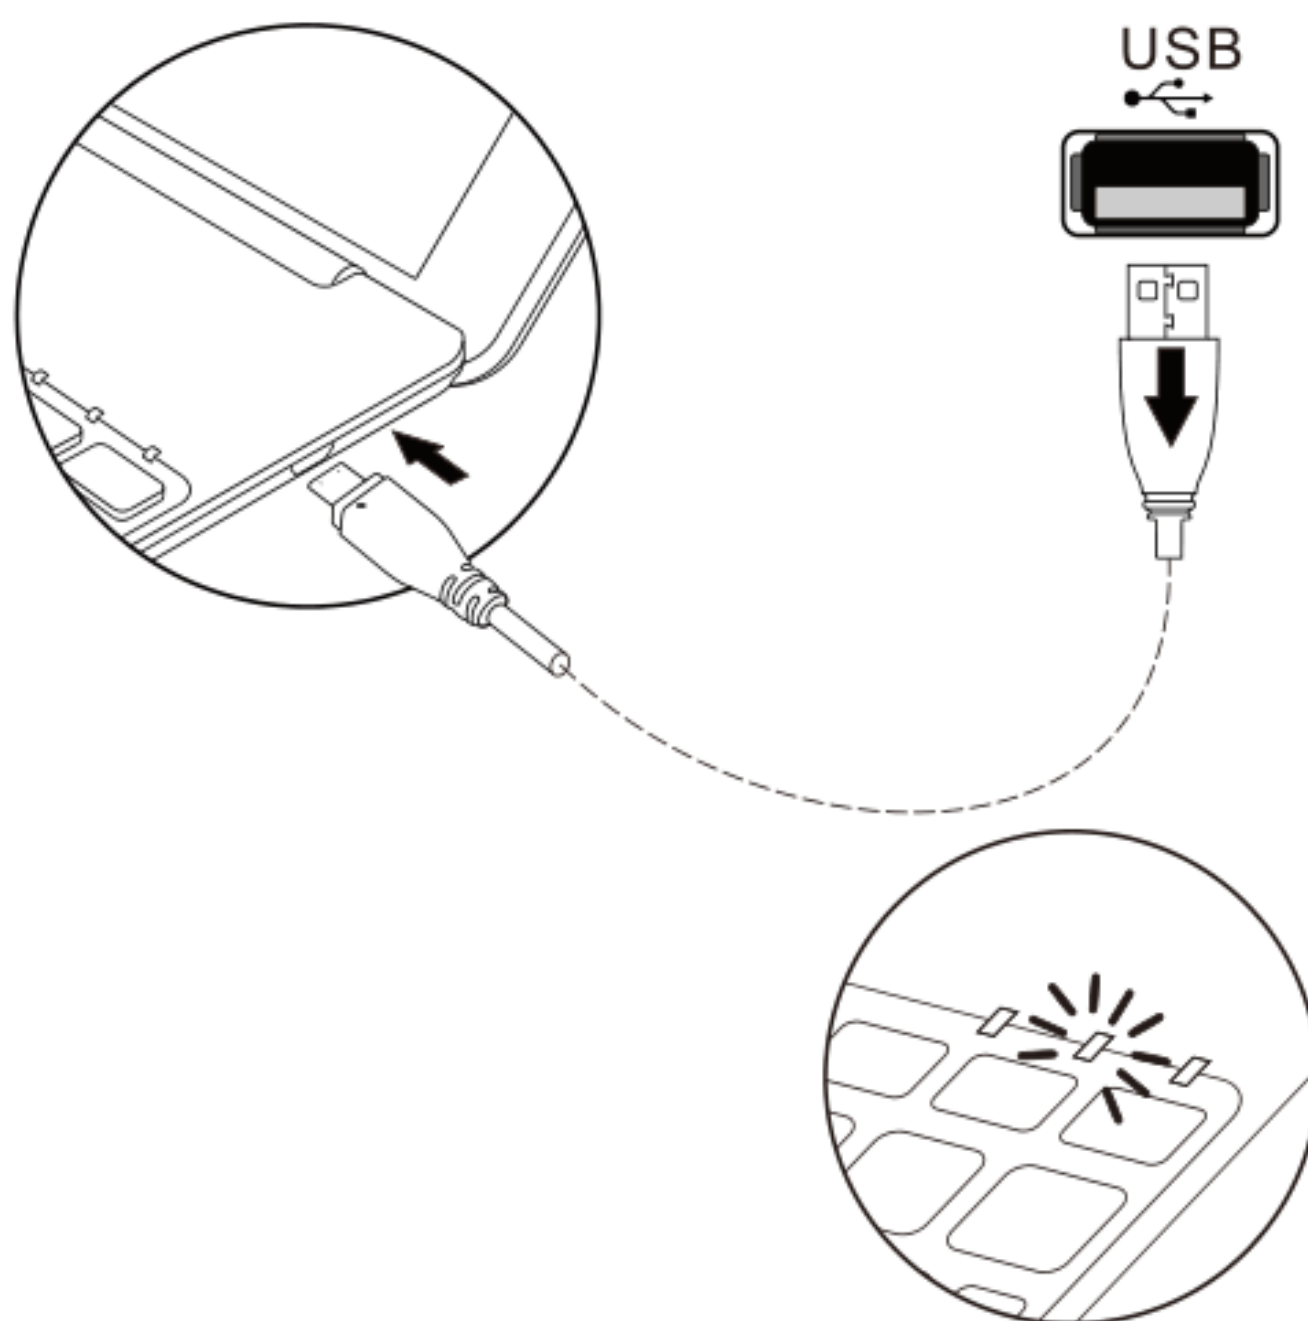

1. 打开键盘，当电池指示灯闪烁橙色灯时表示电量不足，请为键盘充电。
2. 键盘进入充电状态时，电源指示灯红灯常亮，表示正在给键盘充电。
3. 键盘在充电状态中，电源指示灯由红灯变成了绿灯,表示键盘已充满电(约3小时内可充满)，充满后可拔出电源线。

保养:常温下保存，5V电压状态下充电，如长时间不用，需适时为键盘充电(2个月左右充一次)。

Product introduction

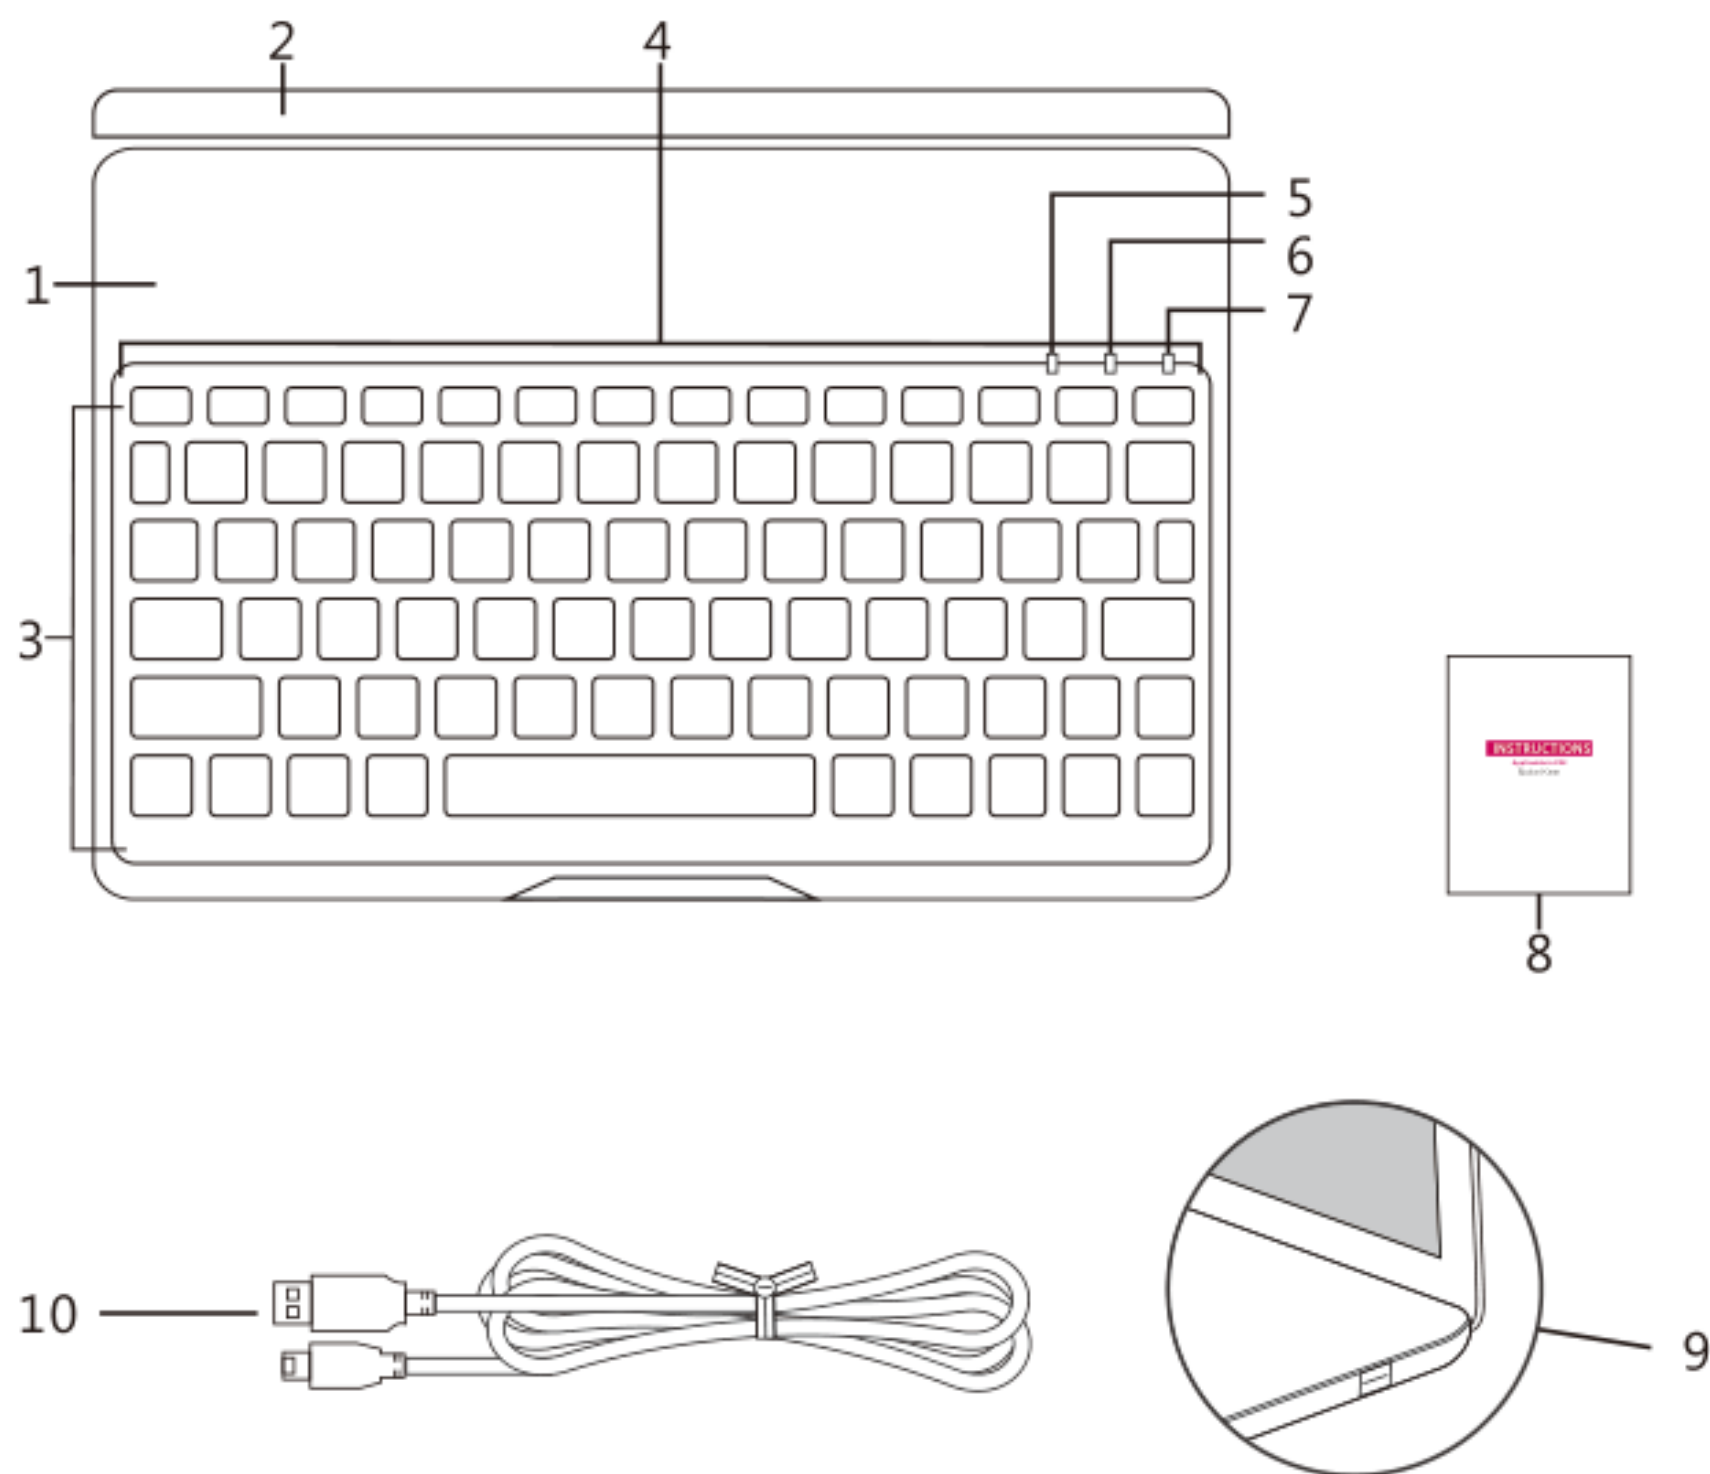


- 1. Keyboard body
- 2. Protective cover
- 3. Keyboard
- 4. Function keys
- 5. Capital indicator

- 6. Battery indicator
- 7. Wireless indicator
- 8. Manual
- 9. Charging keyboard interface
- 10. Micro-usb charging cable

Load/Unload the ipad


Load the iPad

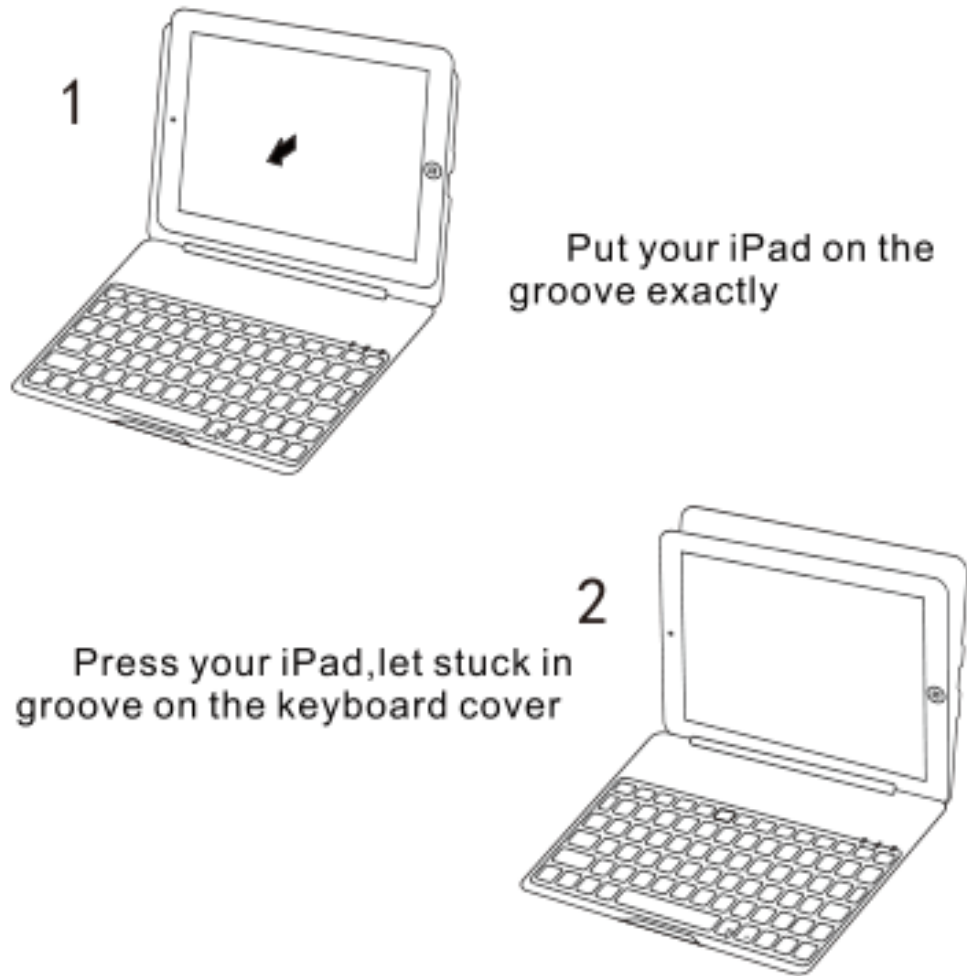

Unload the iPad



Turn on and off

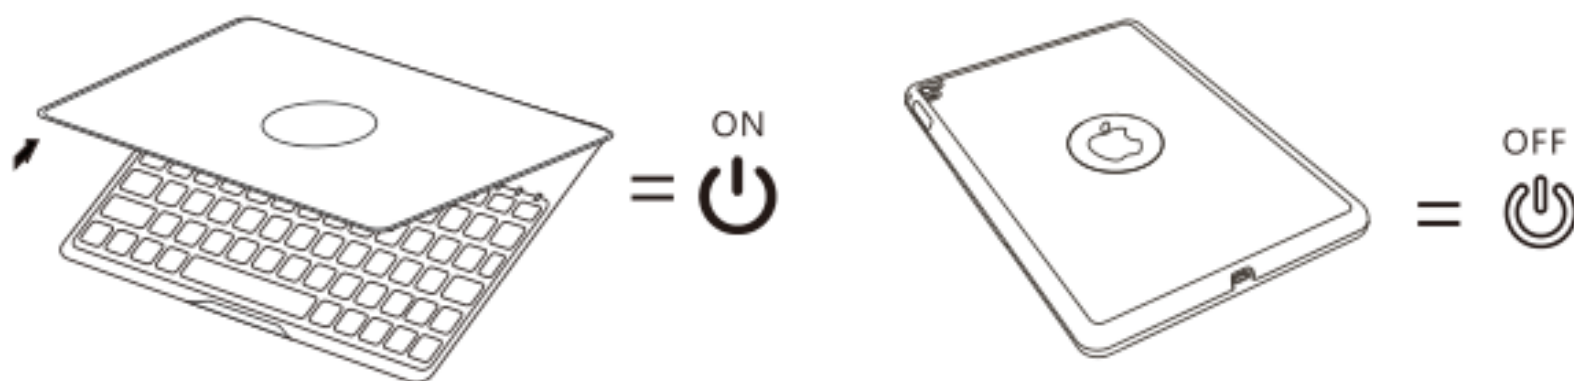


Turn on: open the keyboard cover ,all the indicator flashing on the keyboard , successfully open the power.

Turn off: close the keyboard cover,successfully close the power ,enter into sleep mode.


Wireless connection

1

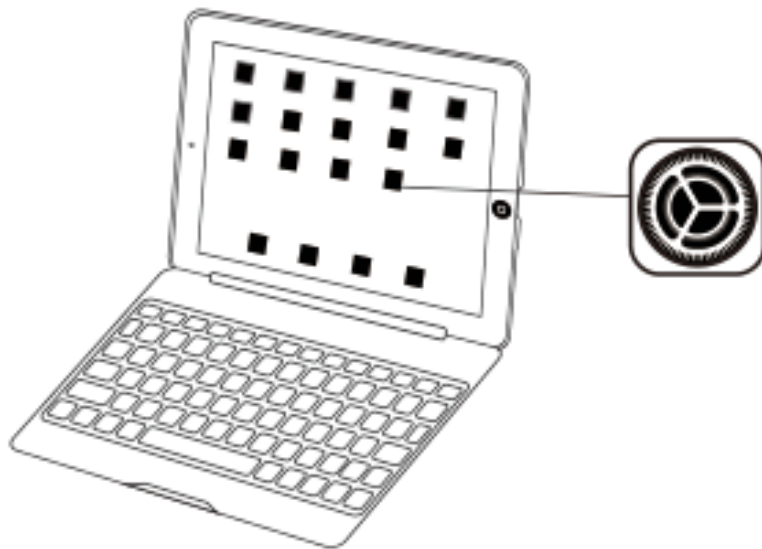


Open your iPad's Settings

2

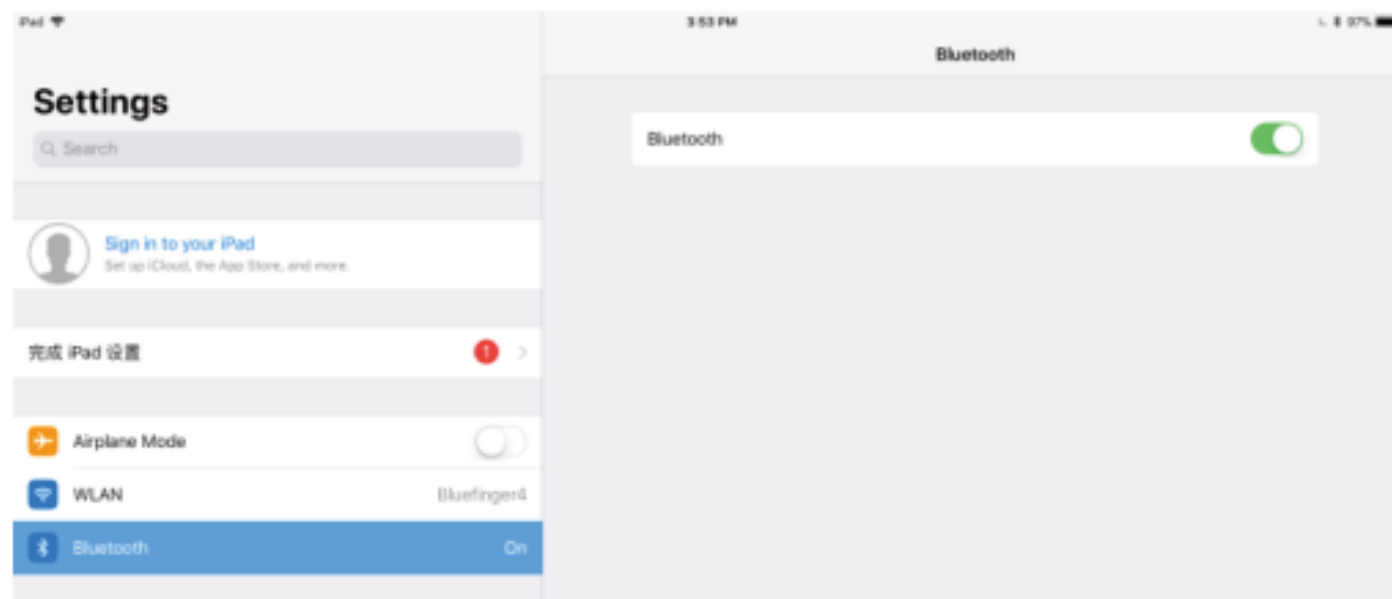

Let the iPad in a search state

3

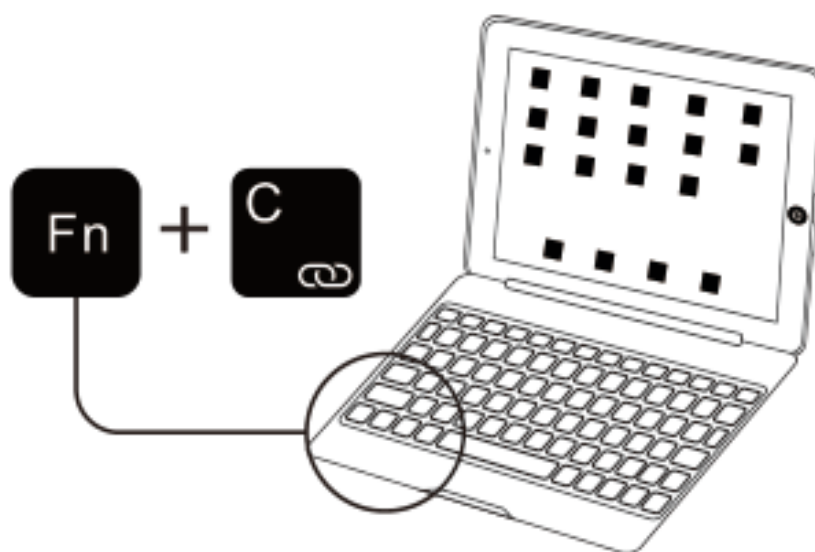


$\text{Fn} + \text{C}$, the keyboard will stay on searching state within 3 minutes

4



On the setting menu choose iPad Keyboard, wireless signal light go out, connection is successful

Keyboard function introduction

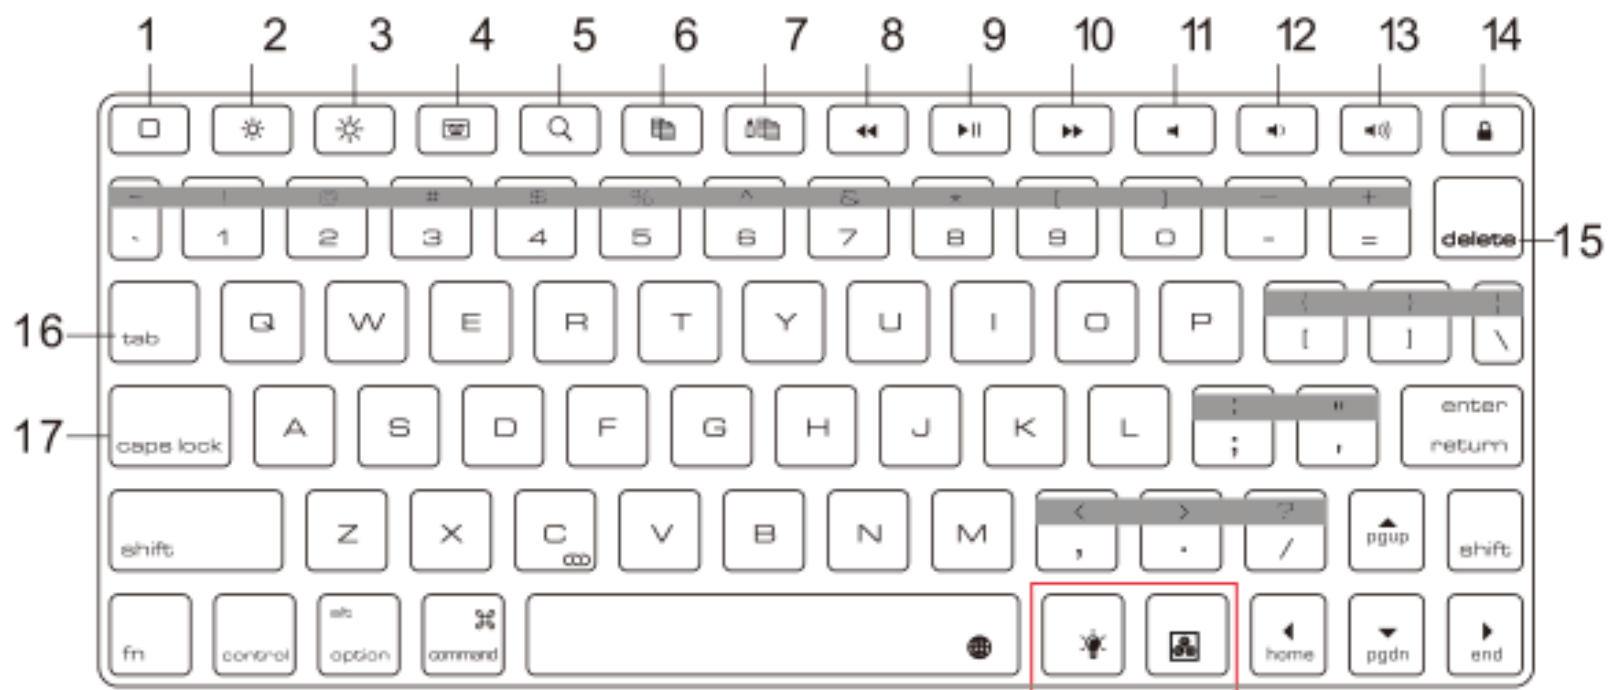

- | | |
|--|---|
| 1. Home (Displays the iPad home screen) | 10. Forward |
| 2. Darker | 11. Mute |
| 3. Brighter | 12. Volume down |
| 4. Virtual keyboard | 13. Volume up |
| 5. Search (Launches the iPad search function) | 14. Fn+Lock (Locks or unlocks the iPad screen) |
| 6. Copy | 15. Delete |
| 7. Stick | 16. Tab |
| 8. Back | 17. Caps Lock |
| 9. Play/pause | |

Special key instructions

- 1、 To alternate the language input methods by pressing +
 - 2、 Turn on/off or adjust the backlit. Operating Method: Press once to turn on the backlit. Press again will increase the brightness. The third time will maximize the brightness. And the fourth time will turn off the backlit.
 - 3、 To alternate the 7 backlit color (red, yellow, blue, green, cyan, purple, white)
 - 4、To type the character in grey, hold shift and press the desired character.
- (Note: second, third items are suitable for backlighting)

5、 + other keys can realise some uncommon special characters

6、Some special short characters

Cut  + 

Paste  + 

Select all  + 

Copy  + 

Product parameter

1. Operating distance : 10 meter
2. Modulation System: GFSK
3. Working voltage: 3.3-4.2 V
4. Working Current: 2.5 mA
5. Charging Current: 250 mA
6. Standby Time: 50 days
7. Continuous Working Time: 180 H(without backlit)
3 H(with backlit)
Without backlit version : 180 H
8. Charging Time: ≤ 3 hours
9. Lithium battery capacity : 500mAh
10. Lithium battery Life: 3 years
11. Key life: >5 million strokes
12. Operating temperature: $-10 \pm 55^{\circ}\text{C}$

Product Features

Super-slim and portable

Using ultra-thin Design concept, the thickness of key only 4mm, super light for carry.

Humanization of stent

Shaft bracket design, can change from multi-angle. meet your visual needs at you're the best visual angle.

Intelligent switch

The intelligent induction can turn the keyboard on and off. Closing the cover will automatically put it into sleep mode. To turn it back on, simply open the cover. Shortcut key Fn+C can open wireless, click wireless signal on the iPad for pairing. Get rid of old complex pairing, more convenient and quick.

Super-slim and portable

Using ultra-thin Design concept, the thickness of key only 4mm, super light for carry.

Magnetic type of design

Magnetic and slot type design, the spindle can change from multi-angle, meet your visual needs at your best visual angle.


Backlights with seven colors

Seven color backlighting design, can provide different brightness control. Different visual enjoyment for you.

Intelligent switch

The intelligent induction can turn the keyboard on and off. Closing the cover will automatically put it into sleep mode. To turn it back on, simply open the cover. Shortcut key Fn+C can open wireless, click wireless signal on the iPad for pairing. Get rid of old complex pairing, more convenient and quick.

Recharge the keyboard

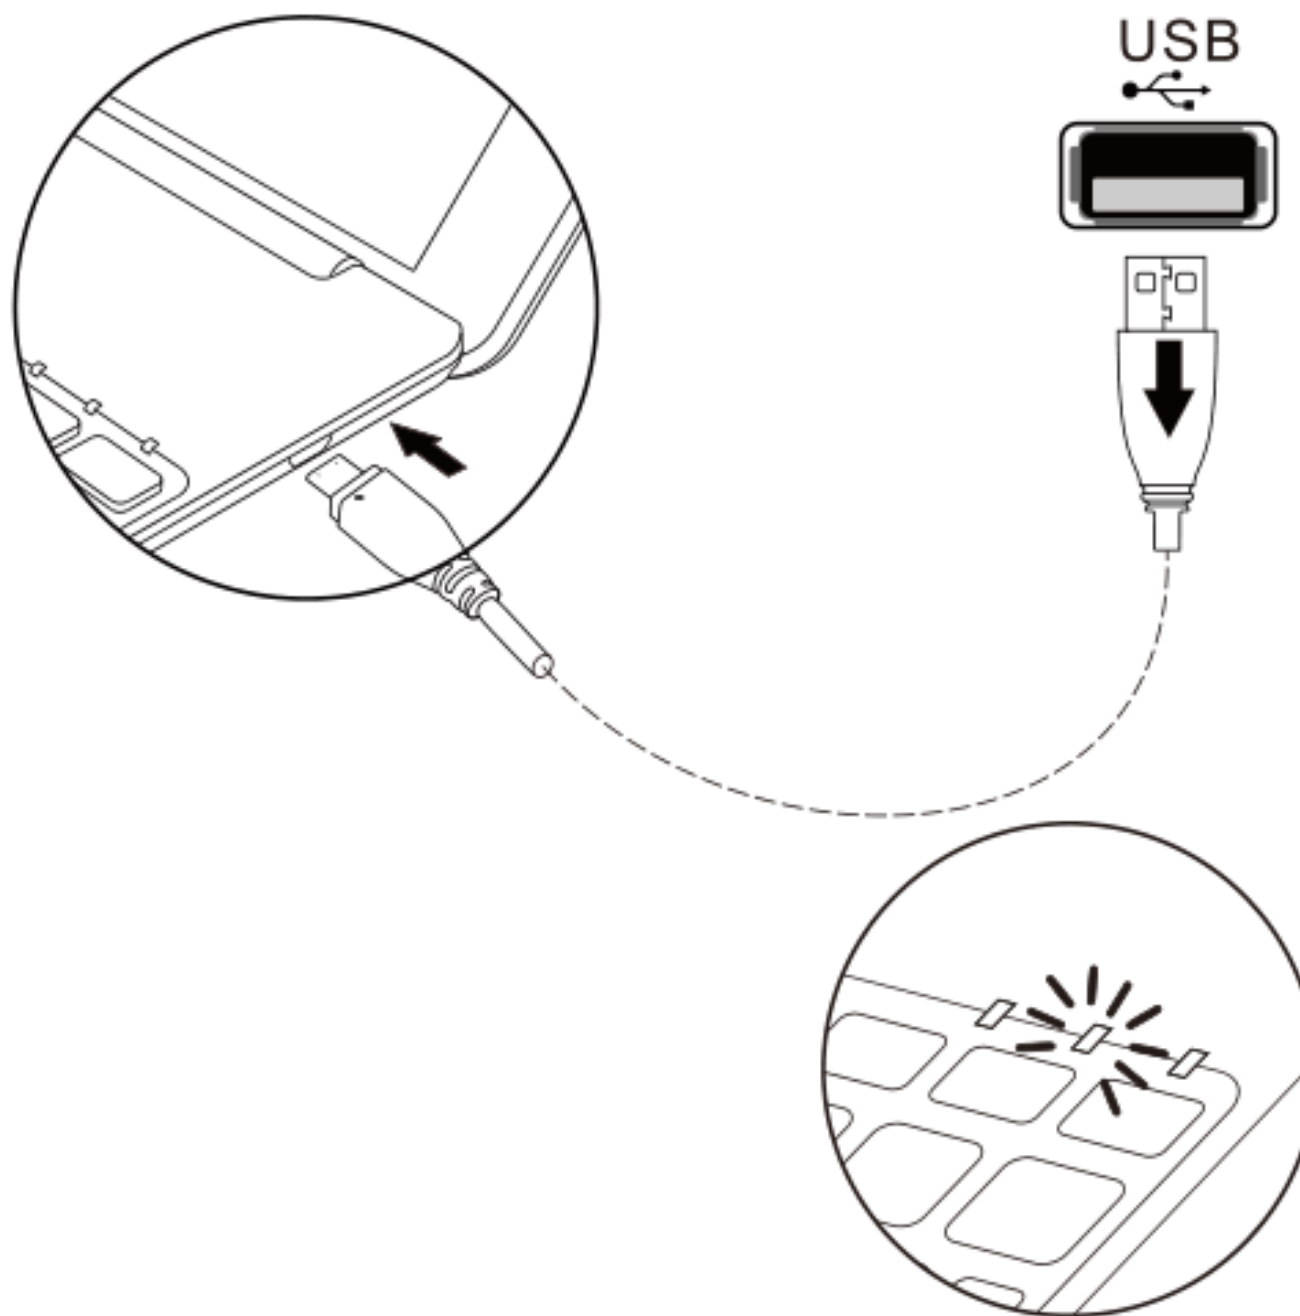

1. Open the keyboard, when the battery indicator is flashing orange, please recharge the keyboard.
2. Insert the usb charging cable at the keyboard and usb port on the computer, indicator become steady red light, shows it is recharging the keyboard.
3. Recharge keyboard until the green status indicator light into stable means a full charge (about 3 hours can be fully charged)

Maintenance:

Preserve the keyboard under normal temperature, recharge under normal voltage. If do not use for long time, need to timely charge (once of two months).

Keyboard battery disposal

- Insert screwdriver between plastic top and metal case at keyboard top or bottom
- Pry up plastic top and remove it completely. This action destroys keyboard
- Turn top over and remove tape from battery.
- Separate battery from circuit board
- Dispose of battery according to local laws. Recycle remaining keyboard parts.

Table of Toxic and Hazardous Substance / Elements and Their Content

Ingredients	(Pb)	(Hg)	(Cd)	(Cr(VI))	(PBB)	(PBDE)
Cable	X	O	O	O	O	O
PWAs	X	O	O	O	O	O
Plastic parts	O	O	O	O	O	O
Membrane	O	O	O	O	O	O
Meter parts	X	O	O	O	O	O
Rubber dome	O	O	O	O	O	O

O stands for this toxic and hazardous content in homogeneous material is under the SJ/T11363-2006 Standards limits

X stands for this toxic and hazardous content in homogeneous material is beyond the SJ/T11363-2006 Standards limits

Under the ingredients with 'X' in the form all are up to ROHS;

“on 27 January 2003 the European parliament and the council announce electronic equipment in limiting the use of certain hazardous substances directive 2002/95/EC”

Note: the environmental protection using period reference standard depends on the product of the regular work temperature and humidity conditions.

*.we won't note you if changing the content of the instructions and specifications.
本说明的内容及本产品的规格如变更，恕不另行通知



Caution: To use this product properly, please read the instructions
注意：正确操作本产品，请仔细阅读用户手册。

made in china