

钥匙密码盒说明书

打开键框

- 1.滑动盖门,显示拨号和开关按钮
- 2.将拨号数旋转到目前组合(设置键框的组合)
原始密码0-0-0-0
- 3.把门完全打开，然后把钥匙取走关上门，
重新调整密码，锁上门并隐藏起来
- 4.关闭盖门

设定你的组合：


- 1.打开键框，按原始代码0-0-0-0保留拨号
- 2.钥匙箱内部的门对着你(重置按钮应该是左侧)
将门背面的复位杆向右推并向上推（从a到b，见图1）
b按您希望的组合旋转刻度盘-确保刻度盘正确且清晰排列，见图2
- 4.向下和向左推动复位杆，回到原来的位置（从b到a），
一定要检查杠杆是否完全恢复到原来的位置和小的右边的银色螺栓冲向侧面
- 5.关上门，重新调整组合拨号，锁上门，隐藏你的结合体
- 6.关上盖门

注意：设置代码后请不要旋转所有的拨号，只要旋转一个拨号就可以了在安装钥匙保险箱之前

重要提醒

- 1.我们不推荐使用“a-a-a-a”这样容易破解的组合
- 2.建议每周转动刻度盘，使其自由移动

图片 1
图片2

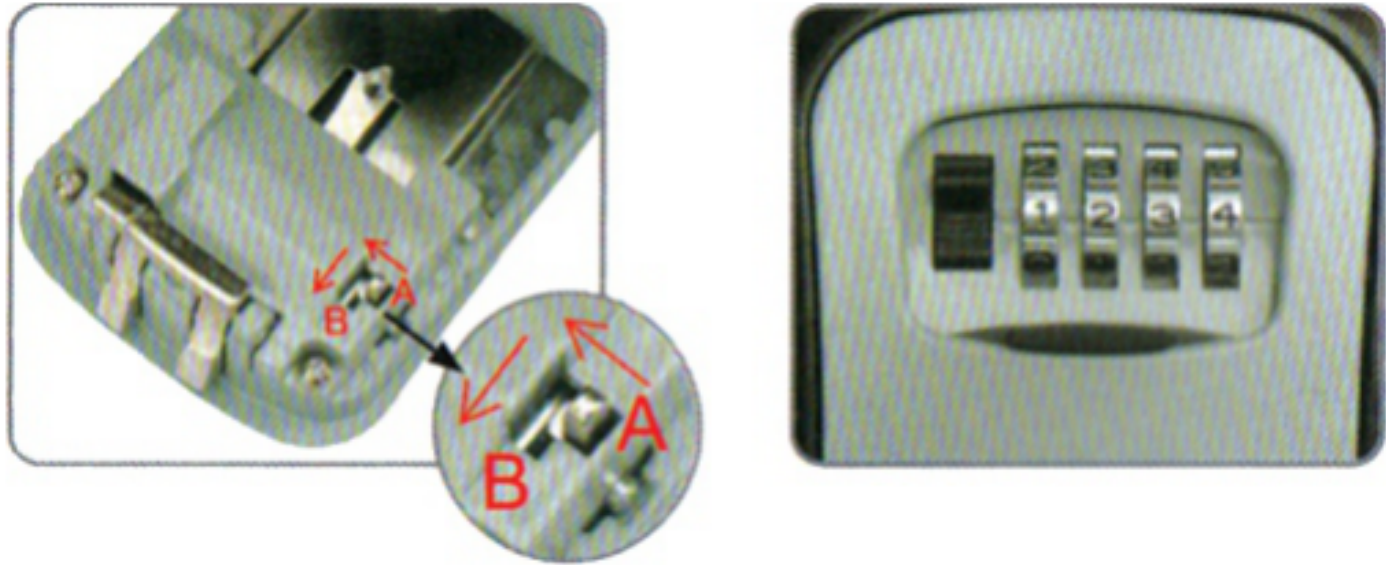


Enterin Combination Key Safe Box Instruction

To open the key box:

- 1. Slide shutter board to reveal the dials.
- 2. Rotate dials to the current combination. (factory combination is 0-0-0-0)
- 3. Push down button near the dials, the cover is open.
- 4. After closing the cover, upset the dials to protect your combination.
- 5. Close the shutter board.

To set your combination:

- 1. Open the key box, leave dials at current combination. (factory combination is 0-0-0-0)
- 2. Push the RESET button from position A to position B, as shown in Pic 1.
- 3. Now rotate dials to set your desired combination.
- 4. Push the RESET button back to position A. Now the new password has been set.

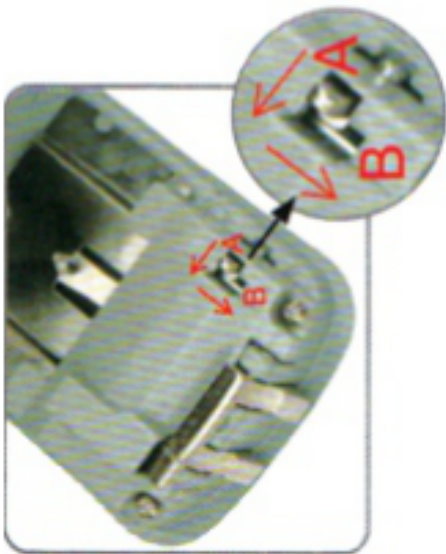

(Pic 1)



(Pic 2)


IMPORTANT NOTES

- 1. Keep the shutter board closed for water resistance.
- 2. It is recommended that the dials are rotated weekly to keep them work well.
- 3. Take a photo to save your password.

Instruction:

On the wall:

- 1. Open the box, inside there will be 5 holes in the back of the box.
- 2. Hold the box to the wall and mark position of 3 holes with a pencil. (every small hole diameter = 6mm)
- 3. Using a masonry drill to drill the holes into wall.
- 4. Place plastic expanded plugs into the wall.
- 5. Place box against wall with screws.

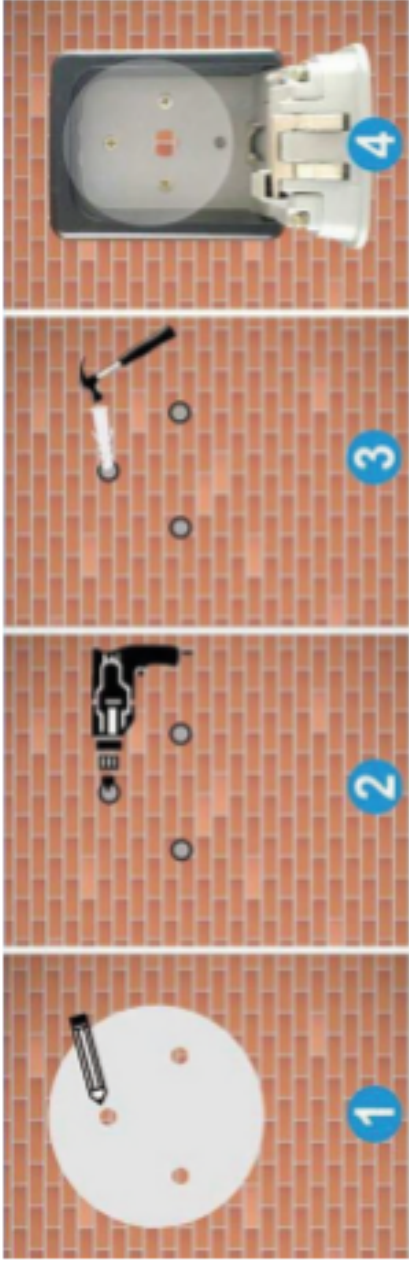

On the peephole:

- 1. Dismantle the peephole.
- 2. Install the box by long screw. (Long screw through the backplate then through the the big hole of middle)
- 3. Fix the backplate and screw on the nut. (The long screw through the peephole then install the other backplate, screw on the nut)