

## D12 User guider

### Operation:

Switch ON/OFF button, open and close alarm host.

Short press SET button to change the alarm host model.

Model Setting( short press SET button)

|   | Model        | Host “Di” times | Work Method                                                                                                                                                       |
|---|--------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Normal Alarm | 1               | Alarm when the door open                                                                                                                                          |
| 2 | Open prompt  | 2               | After the door is opened, the door host will doorbell prompt                                                                                                      |
| 3 | Open Alarm   | 3               | Alarm when door open , the alarm stop when door sensor and the magnetic strip closed.                                                                             |
| 4 | Close prompt | 4               | Separate door sensor and magnetic strip, the door alarm didi, the volume level from small to large circular , until close the door sensor and the magnetic strip. |


**Note:** When the door sensor host alarm ,short press the SET key or turn off the switch to stop alarm;If not press the SET key,

The host will alarm for 1 minute

Installation

### 安装图述


#### 门磁主体安装步骤

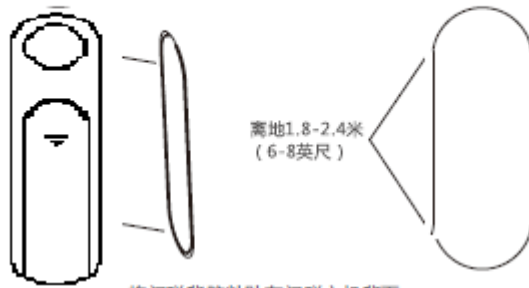

离地1.8-2.4米  
( 6-8英尺 )

将门磁背胶粘贴在门磁主机背面，  
磁条安装步骤与主机一致。

#### 安装完成

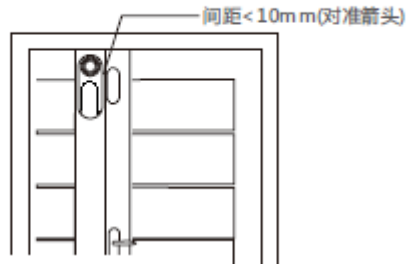

间距 < 10mm (对准箭头)

安装图述：Installation diagram

门磁主体安装步骤：Door detector installation steps

将门磁背胶粘贴在门磁主机背面，磁条安装步骤与主机一样：Stick the velcro on the back of the host, the magnetic installation steps is the same as the host.

离地 1.8-2.4 米 ( 6-8 英尺 )：From the ground 1.8-2.4m(6-8inch)

安装完成：Installation complete

间距 < 10mm: Interval < 10mm

门磁拔电池关机或者低电关机后，门磁主机将自动恢复到最初的状态：when we remove the battery to turn off the door detector or low battery off, the host will return to its original status automatically.

### Technology Parameters

Operating voltage: 3V (2 AAA button batteries)

Environment humidity: <90%

Working humidity: -10 ~ 60 °

Alarm output: open the door prompt, open the door alarm and not close door prompt