

MW365 Operation Instructions and Introduction

WIFI Camera



MW365







APP Download Instructions



MW365


- 1.Scan the QR code with your mobile phone to download the APK through the Android channel in the QR code. iPhone users can be redirected to the APPSTORE.
- 2.Alternatively, you can search for "MW365" on Yingyongbao , Google Play, or the App Store to download.

Device Addition and Networking

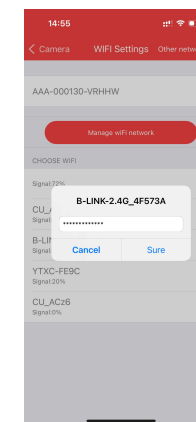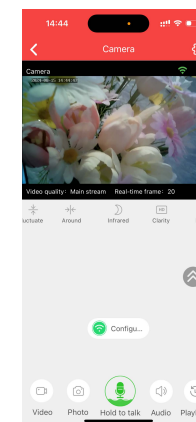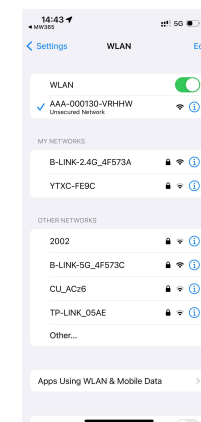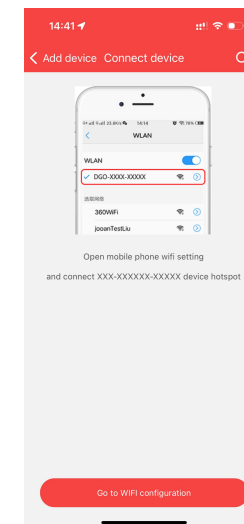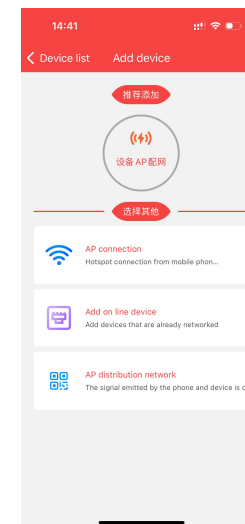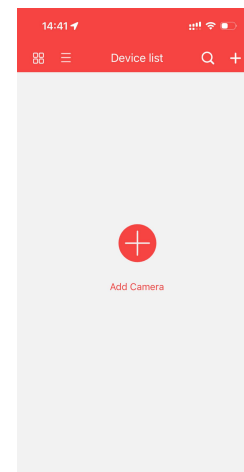


- 1.Open the APP to enter the device list interface.
- 2.Click “ Add Device Here ” or the “ + ” sign in the device list.
- 3.Select the “ Device AP Configuration ” option.
- 4.Click the “ Go to WIFI Configuration ” button and select the relevant device AP signal to connect.
- 5.After connecting to the device AP, return to the APP interface to automatically add the device.
- 6.After the device is added, click the interface to enter the video interface to configure WIFI.
- 7.Click “ Configure Network, ” select any desired WIFI, enter the password, return to the device interface, and wait for the WIFI connection to complete.

Real-time Image Function Instructions

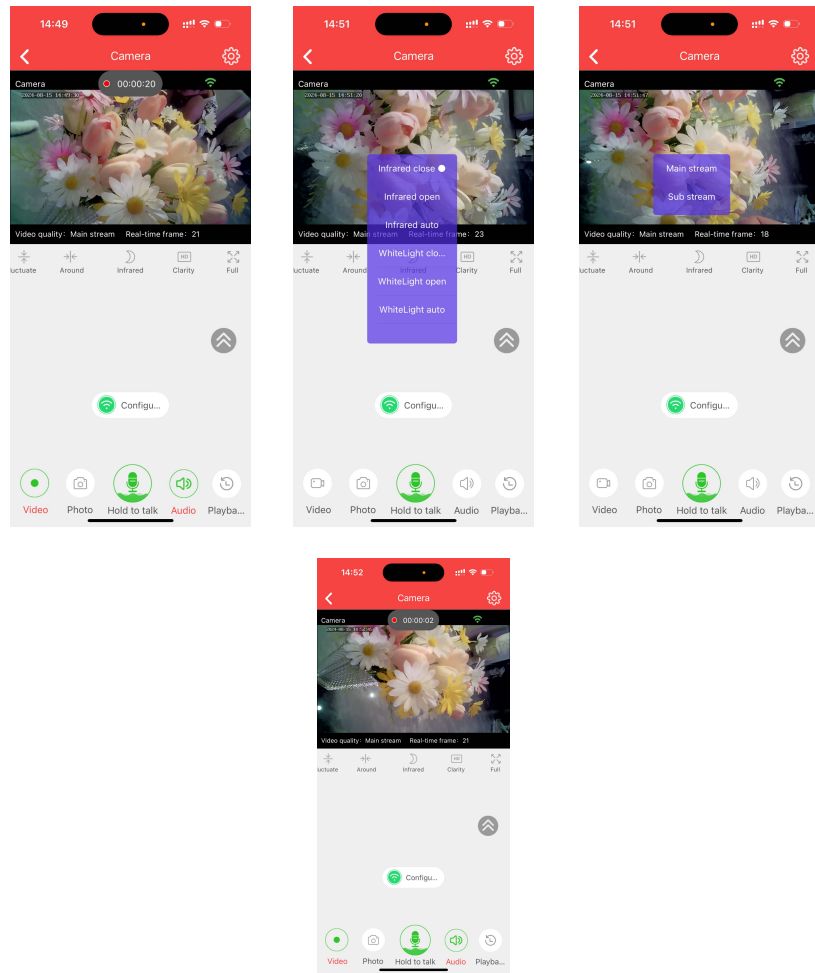


1. Click “ Up/Down ” to invert the image.
2. Click “ Left/Right ” to mirror the image.
3. Click “ Night Vision ” to toggle the infrared night vision function.
4. Click “ Clarity ” to switch between “ Ultra HD ” and “ HD. ”
5. Click “ Full Screen ” to enable landscape mode on your phone.
6. Click “ Record ” to record real-time images.
7. Click “ Photo ” to take a snapshot of the real-time image.
8. Click “ Intercom ” to enable voice communication (applicable to relevant models).
9. Click “ Sound ” to listen to the live audio.
10. Click “ Playback ” to enter the SD card recording interface for real-time video playback.

Device Settings Function Instructions

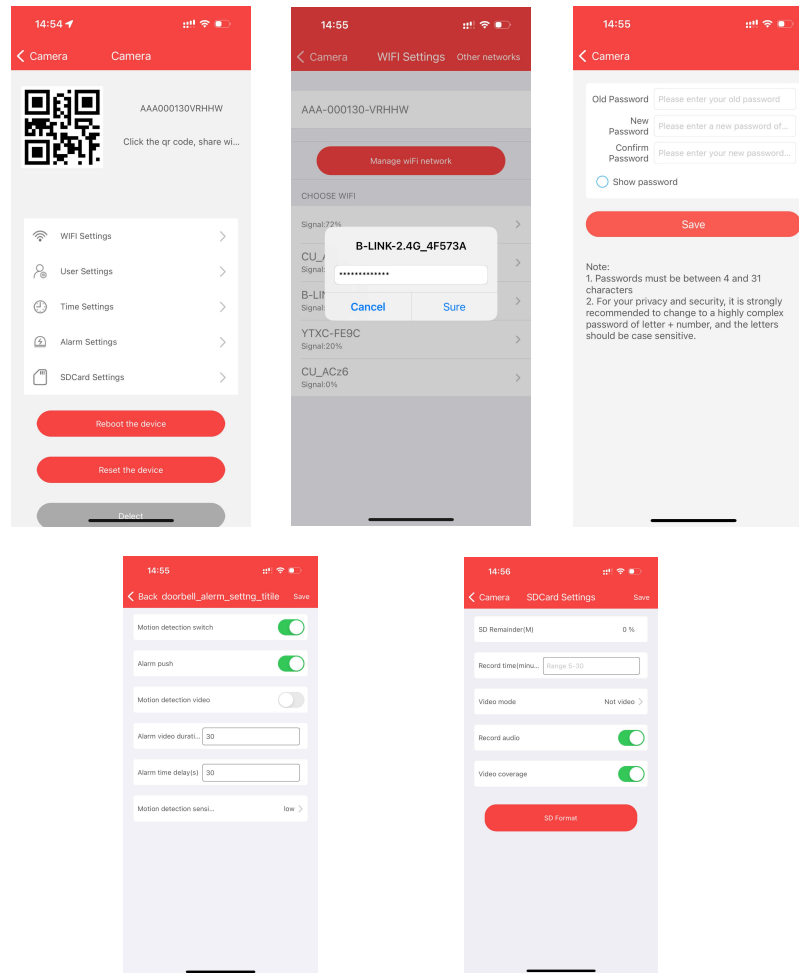

1. Click the gear icon on the “ Device List ” to enter the device settings interface.
2. Click “ WIFI Settings ” to change the WIFI network for the connected device.
3. Click “ User Settings ” to modify the device name and password.
4. Click “ Device Clock Settings ” to change the current time zone or related time.
5. Click “ Alarm Settings ” to modify alarm parameters (generally not recommended to change).
6. Click “ SD Card Recording Settings ” to modify SD card recording parameters.
7. Click “ Reset Device ” to reset the device.
8. Click “ Restart Device ” to reboot the device.

SD Recording and Other Function Instructions

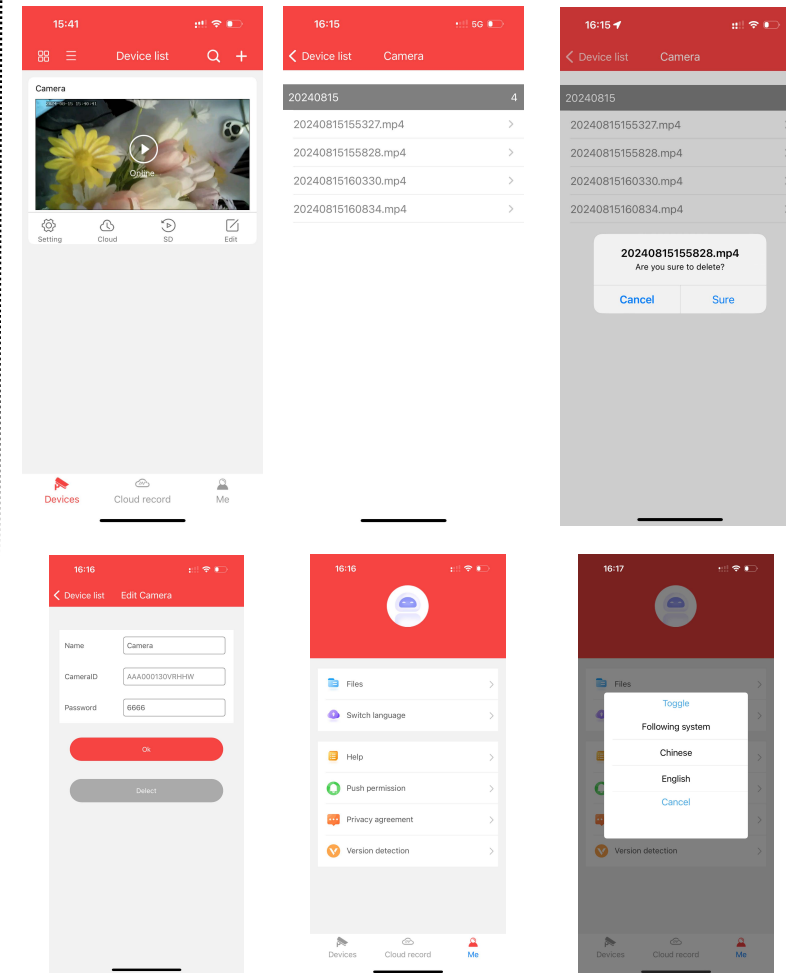

1. Click “ SD Playback ” to enter the SD card recording interface.
2. Click any recording file to enter the remote playback interface. Poor WIFI connectivity may cause playback stuttering.
3. Long press any recording file to download. After downloading, you can share it.
4. Click “ Camera ” to enter the interface for modifying the device name and password (initial password is 6666).
5. Click “ My ” to enter the “ Image Center ” and “ Multi-language ” interface.
6. Click “ Image Center ” to view manually taken photos and recordings.
7. Click “ Multi-language ” to select the appropriate local language.