Bluetooth Keyboard Without Touchpad Version

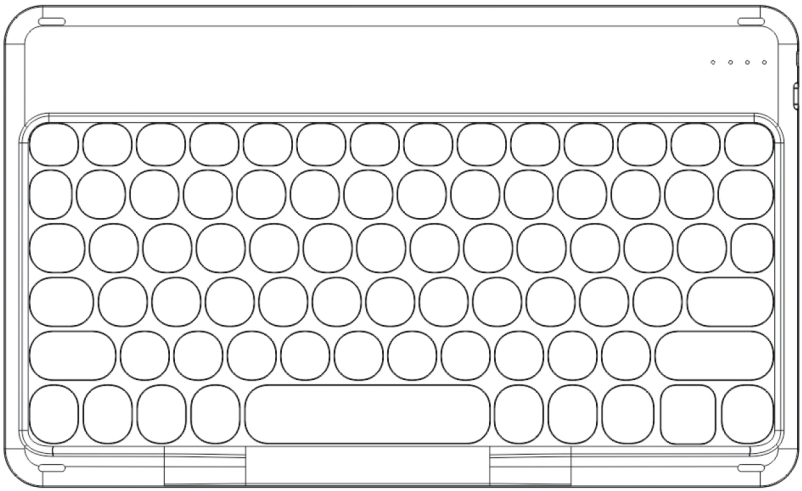

Bluetooth Keyboard With Touchpad Version

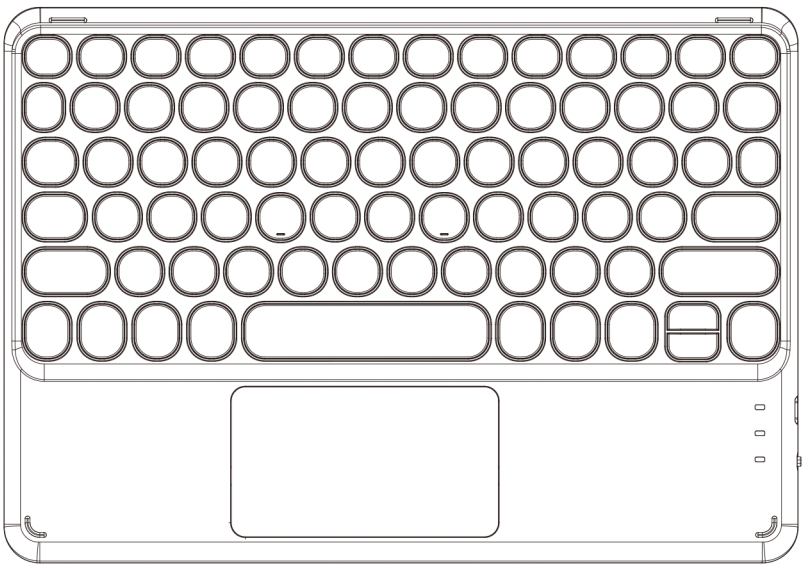

（英 日）说明书 148x208mm-1

圆帽键盘 英文说明书 83x105mm

Wireless Keyboard Operation Manual

As you can see The Blue character on the Keyboard,Please press the **Fn** button plus relevant button to realize the function

Desk/Exit	Previous	Lock Screen
Searching	Play/Pause	Language switching
Select All	Next	Soft keyboard switch
Copy	Volume -	− Screen brightness-
Paste	Volume +	+ Screen brightness+
Cut	Fn Function key	

The instruction is for blacklit version exclusively below:

: Three Modes of Backlit：Open the light / Auto Light Flashing / Light Closed.

: Here interchange the seven colors backlit.

+ PgUp / PgDn : Three levels of brightness adjustment.

Note:Please use the backlit keyboard in Bluetooth Pairing

Fn + C (Connect)	Bluetooth pairing	Fn + E (IOS)	Switch to IOS system	Fn + ← (End)	Top of page
Fn + → (End)	End of page	Fn + ↑ (PgUp)	Page up	Fn + ↓ (PgDn)	Page down
Fn + (touchpad) (Only for touchpad version)	Turn on/off the touchpad (Make sure your iPad IOS system is >= 13.0, then turn on the touch function of the IPAD: **Settings** - **Accessibility** - **Touch** - **Assistive Touch** - **Open**)				
Command (Cmd) + A	Select all	Command (Cmd) + X	Cut	Command (Cmd) + C (Connect)	Copy
Command (Cmd) + V	Paste				
CapsLock	As a Capital key: **Open Settings** - **General** - **hardware keyboard** - **Switch languages using Caps Lock** off in your iPad and the capital key will be defaulted.				
	As a Language switch key: Open **Settings** - **General** - **Keyboard** - **Switch languages using Caps Lock** in your iPad, and the language switch key will be defaulted.				







How to connect iPad and Bluetooth keyboard?

1. After turning the power switch to the **ON** position, the power indicator light will stay on for 3 seconds then light is off.



2. Open and unlock the iPad, click the "**Settings**" icon.



3. In the settings, click the **Keyboard**.



4. Press **Fn+C** on the Bluetooth keyboard to enter the pairing mode, and the Bluetooth indicator light starts to flash and the iPad will start searching for Bluetooth keyboard devices.



5. Discover the Bluetooth keyboard device: **Bluetooth Keyboard**, and click it, the Bluetooth keyboard will automatically connect.



6. After the Bluetooth connection is successful, the pairing indicator will turn off, and the device "**Connected**" will be displayed in the Bluetooth device list.

Instructions about touchpad gestures (Only for touchpad version)



Slide your finger (=Moving the cursor)

Single finger tap (=Left button of the mouse)



Single-finger fast double click quickly without loose drag (=Left-click to select the target drag)

Fingers tapping (=Right mouse button)

Swipe up or down with 2 fingers(=Wheel scrolling)

Swipe between pages Swipe leftor right with 2 fingers to display the previous or next page

Move 3 Fingers move up at the same time (=Switching the recent task)

Move 3 Fingers move down at the same time (=Returning to the main interface)

Fingers sliding left and right at the same time (=Sliding left and right in the active window)

Fingers zoom (=Effective in the state of the webpage, not in the picture)

Problems you may encounter

No response when using the keyboard for the first time:
After making sure that the switch is turned to the ON position, you must press FN+C for Bluetooth pairing.

No response when using the keyboard for the second time:
Turn on the keyboard switch and turn on the Bluetooth of the IPAD at the same time, the keyboard will automatically pair and connect with the Bluetooth. If you are unable to connect, you should clear the Bluetooth record on the ipad host, then turn off the “Bluetooth” and turn on the “Bluetooth” again, press FN+C, the device “Bluetooth Keyboard” will be displayed. Then click it and connect.

Attach a clear record of the steps

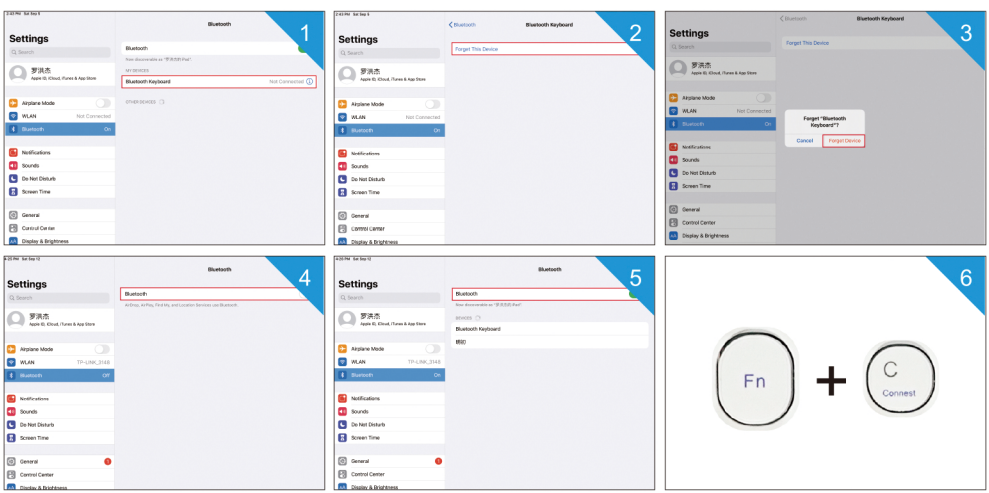

If sometimes you meet keys no response, first pls check whether it enters into IOS mode, pls press FN+E / IOS to enter to the IOS mode then it can work.

Energy saving sleep mode

When keyboard not use will be enter sleep mode after 15minutes, keyboard indicator will off, press any key 5s to wake it up when need use again, then keyboard indicator will turn on.